Technical Manual

HLS 620

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance 8 ohms
- Max Amp Power 200 watts
- Frequency Response 42Hz - 20kHz (±3dB)
- Sensitivity 89 dB (1 watt @ 1 meter)
- Crossover Frequency 2700 Hz

SYSTEM COMPONENTS:

- Cabinet HLS 620 (Not For Sale)
- Grille 332697-001
- Low Frequency Transducer* (2) 6 1/2" Polypropylene, Shielded (332652-001)
  DC Resistance 11.3 ohms ±10%
- High Frequency Transducer* 10mm Polycarbonate Dome (TW010B17/101829B)

SYSTEM COMPONENTS: (cont.)

DC Resistance 5.5 ohms ± 10%

- Crossover Network 332701-001

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 40 Hz to 20 kHz
- L.F. Aural Sweep Test 6.0V Input 30 Hz to 3 kHz
- H.F. Aural Sweep Test 2.83V Input 2 kHz to 20 kHz

PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 35 3/4 x 8 5/16 x 11 7/16" (H x W x D) 908 x 211 x 291mm
- Weight 35lbs. (15.9kg) Each

WARRANTY:

- Refer to Warranty Statement packed with each product.

PACKAGING

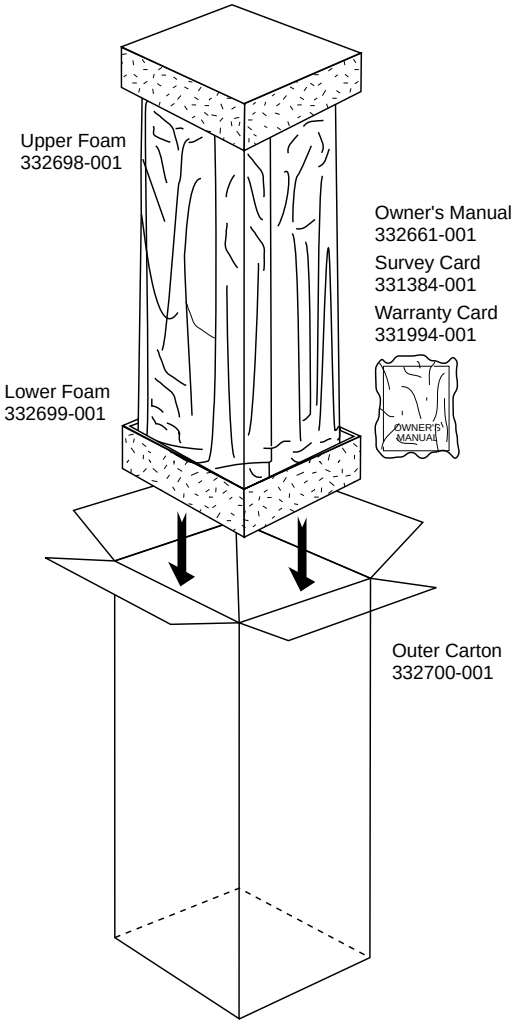

WIRING DIAGRAM

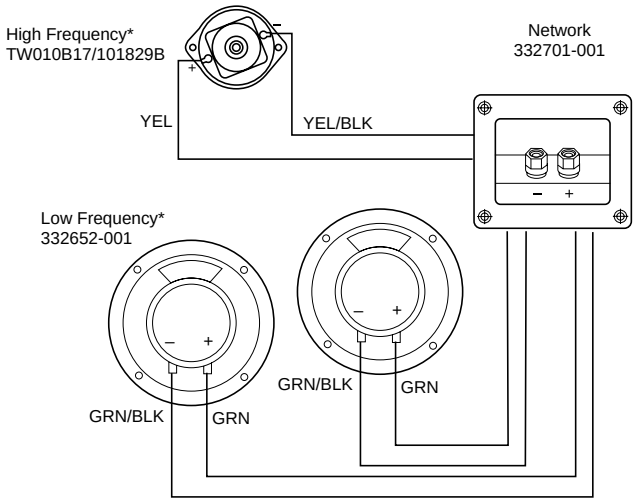

HLS 620 SCHEMATIC

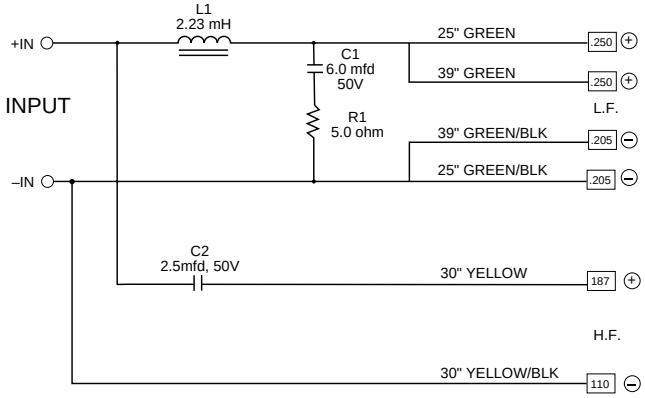

HLS 620

HLS 620

COMPONENT EXPLODED VIEW

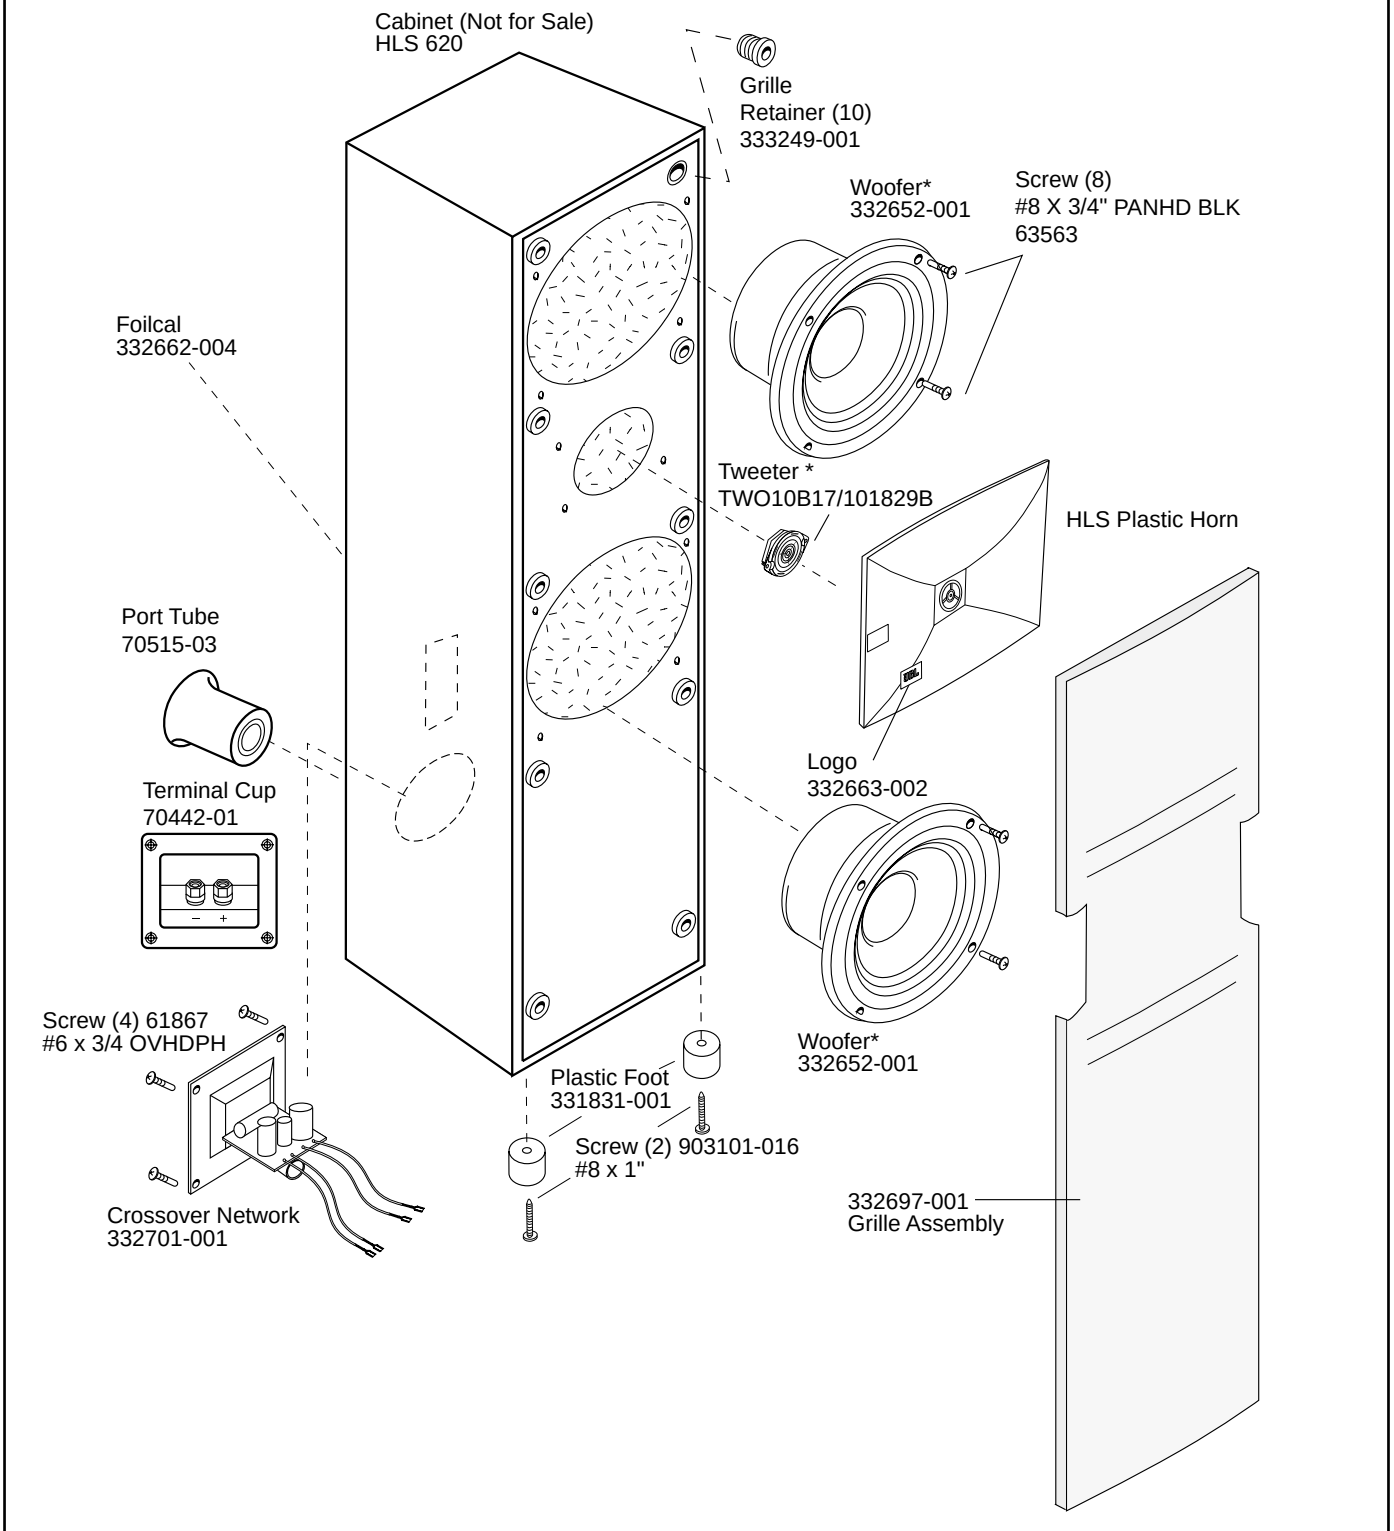

* See JBL Service Bulletin #JBL9703 for details regarding the removal and installation of drivers.

HLS 620